

Systems identification for passive linear quantum systems: the transfer function approach

Madalin Guta and Naoki Yamamoto

Abstract—System identification is a key enabling component for the implementation of new quantum technologies, including quantum control. In this paper we consider a large class of input-output systems, namely linear passive quantum systems, and study the following identifiability question: if the system’s Hamiltonian and coupling matrices are unknown, which of these dynamical parameters can be estimated by preparing appropriate input states and performing measurements on the output?

The input-output mapping is explicitly given by the transfer function, which contains the maximum information about the system. We show that two minimal systems are indistinguishable (have the same transfer function) if and only if their Hamiltonians and the coupling to the input fields are related by a unitary transformation. Furthermore, we provide a canonical parametrization of the equivalence classes of indistinguishable systems. For models depending on (possibly lower dimensional) unknown parameters, we give a practical identifiability condition which is illustrated on several examples. In particular, we show that systems satisfying a certain Hamiltonian connectivity condition called “infecting”, are completely identifiable.

I. INTRODUCTION

We are currently witnessing the beginning of a quantum engineering revolution [1], marking a shift from “classical devices” which are macroscopic systems described by deterministic or stochastic equations, to “quantum devices” which exploit fundamental properties of quantum mechanics, with applications ranging from computation to secure communication and metrology [2]. While control theory developed from the need for predictability in the behavior of “classical” dynamical systems, quantum filtering and quantum feedback control theory [3], [4], [5] deals with similar questions in the mathematical framework of quantum dynamical systems.

System identification is an essential component of control theory, which deals with the estimation of unknown dynamical parameters of input-output systems [6]. A similar task arises in the quantum set-up, and various aspects of the *quantum system identification* problem have been considered in the recent literature, cf. [7], [8], [9], [10], [11], [12], [13], [14], [15], [16], [17], [18] for a shortlist of recent results.

In this paper, we focus on the class of *passive linear quantum system* which have been extensively studied in recent years [19], [20], [21], [22], [23], and can be used to describe or approximate a large number of physical systems [24]. The system consists of a number of quantum variables (e.g. the electromagnetic field inside an optical cavity), and

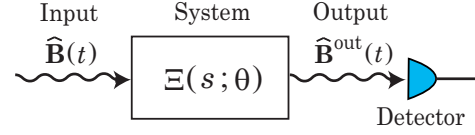


Fig. 1. Setup of system identification for linear quantum systems. The experimenter can prepare a time-dependent input state, and perform a continuous-time measurement on the output, from which the unknown system parameters θ are estimated. The input-output relation is encoded in the transfer function $\Xi(s; \theta)$.

is coupled with the quantum stochastic input consisting of non-commuting noise processes (e.g. a laser impinging onto the cavity mirror). As a result of the quantum mechanical interaction between system and input, the latter is transformed into an output quantum signal which can be measured to produce a classical stochastic measurement process. In this context, we address the problem of identifying the linear system by appropriately choosing the state of its input and performing measurements on the output (see Figure 1).

In this “time-dependent input” scenario we characterize the equivalence class of systems with the same input-output relation (transfer function), find a canonical parametrization of the space of equivalence classes in terms of physical parameters, and investigate special parametric models in which the system is fully identifiable. These results are the first steps of an ongoing project aimed at designing statistically and computationally efficient input states, output measurements, and estimators, as well as characterising the class of equivalent systems in the “stationary input” scenario, which involves the analysis of the power spectrum. Although our investigations are guided and motivated by classical results going back to [25], [26], [27], the quantum setting imposes specific constraints and the goal is to identify quantum features related with e.g. unitarity, entanglement and uncertainty principles.

The paper is structured as follows. In section II we introduce the set-up of linear quantum systems, and formulate the system identification problem. In section III we show that two minimal systems have the same transfer function if and only if their associated Hamiltonian and coupling matrices are related by a unitary transformation (cf. Theorem 2.1), amounting to a change of basis in the space of continuous variables modes. This yields a necessary and sufficient condition for the identifiability of a passive linear system, which is then applied to several examples with different Hamiltonian parametrizations. In section IV we provide a concrete characterisation of the identifiable set of parameters with

M. Guta is with the School of Mathematical Sciences, University of Nottingham, University Park, NG7 2RD Nottingham, UK (email: madalin.guta@nottingham.ac.uk). N. Yamamoto is with the Department of Applied Physics and Physico-Informatics, Keio University, Hiyoshi 3-14-1, Kohoku-ku, Yokohama, Japan (e-mail: yamamoto@appi.keio.ac.jp).

direct interpretation in terms of the coupling and Hamiltonian matrices. Finally, in section V we characterize a wide class of identifiable quantum linear networks, by employing the concept of “infection” introduced in [12], [14].

We use the following notations: for a matrix $A = (a_{ij})$, the symbols $A^\dagger$, A^T represent its Hermitian conjugate and transpose of A , i.e., $A^\dagger = (a_{ji}^*)$ and $A^T = (a_{ji})$, respectively. For a matrix of operators, $\hat{A} = (\hat{a}_{ij})$, we use the same notation, in which case $\hat{a}_{ij}^*$ denotes the adjoint to $\hat{a}_{ij}$.

II. LINEAR QUANTUM SYSTEMS AND IDENTIFIABILITY

In this section we briefly review the framework of linear classical and quantum dynamical systems and then formulate the quantum identifiability problem.

A. Classical linear systems

A classical linear system is described by the set of differential equations

$$\begin{aligned} dx(t) &= Ax(t)dt + Bu(t)dt, \\ dy(t) &= Cx(t)dt + Du(t)dt, \end{aligned}$$

where $x(t) \in \mathbb{R}^n$ is the state of the system, $u(t) \in \mathbb{R}^m$ is an input signal, and $y(t) \in \mathbb{R}^k$ is the output signal. The observer can control the input signal and observe the output, but does not have access to the internal state of the system. The input signal can be deterministic, in which case we deal with a set of ODEs or stochastic, in which case the equations should be interpreted as SDEs. Apart from the input and the initial state of the system, the dynamics is determined by the (real) matrices A, B, C, D .

To find the relation between input and output it is convenient to work in the Laplace domain. The Laplace transform of $x(t)$ is defined by

$$\mathcal{L}[x](s) := \int_0^\infty e^{-st} x(t) dt, \quad (1)$$

where $\text{Re}(s) < 0$. Then, the following input-output relation holds:

$$\mathcal{L}[y](s) = \Xi(s)\mathcal{L}[u](s),$$

where

$$\Xi(s) = C(sI - A)^{-1}B + D \quad (2)$$

is the *transfer function matrix*. System identification deals with the problem of estimating the matrices A, B, C, D or certain parameters on which they depend, from the knowledge of the input and output processes. From (1) it is clear that the observer can at most determine the transfer function $\Xi(s)$ by preparing appropriate inputs and observing the output.

The identifiability problem is closely related to the fundamental system theory concepts of *controllability* and *observability*. The system is controllable if for any states x_0, x_1 and times $t_0 < t_1$ there exists a (piece-wise continuous) input $u(t)$ such that the initial and final states are given by $x(t_0) = x_0$ and $x(t_1) = x_1$, respectively. This turns out to be equivalent to the fact that the controllability matrix $C = [B, AB, \dots, A^n B]$ has full row rank.

The system is observable if for any times $t_0 < t_1$, the initial state $x(t_0) = x_0$ can be determined from the history of the input and output on the time interval $[t_0, t_1]$. This is in turn equivalent to the fact that the observability matrix $\mathcal{O} = [C^T, (CA)^T, \dots, (CA^n)^T]^T$ has full column rank.

The importance of these concepts for identifiability stems from the fact that if the system is *not* controllable or observable then there exists a lower dimensional system with the same transfer function as the original one. The former can be obtained from the latter by separating its coordinates via a canonical procedure called Kalman decomposition. Therefore, in system identification it is natural to restrict the attention to *minimal* systems, i.e. systems which are both controllable and observable. As noted above, by appropriately choosing the input signal $u(t)$, the observer can effectively identify the transfer function $\Xi(s)$, while other independent parameters in the system matrices are not identifiable. The following theorem gives a precise characterisation of systems which are equivalent in the sense that they cannot be distinguished based on the input-output history.

Theorem 2.1: Two minimal systems (A, B, C, D) and (A', B', C', D') have the same transfer function $\Xi(s)$ if and only if they are related by a similarity transformation, i.e. there exists an invertible $n \times n$ matrix T such that

$$A' = TAT^{-1}, \quad B' = TB, \quad C' = CT^{-1}, \quad D' = D.$$

B. Linear passive quantum system

A general linear quantum system with n continuous variables modes is described by the column vectors of creation operators $\hat{\mathbf{a}}^* := [\hat{a}_1^*, \dots, \hat{a}_n^*]^T$ and annihilation operators $\hat{\mathbf{a}} := [\hat{a}_1, \dots, \hat{a}_n]^T$ satisfying the commutation relations

$$\hat{a}_i \hat{a}_j^* - \hat{a}_j^* \hat{a}_i = [\hat{a}_i, \hat{a}_j^*] = \delta_{ij} \hat{1}. \quad (3)$$

The system has a quadratic Hamiltonian of the form

$$\begin{aligned} \hat{H} &= \hat{\mathbf{a}}^\dagger \Omega \hat{\mathbf{a}} \\ &= [\hat{a}_1^*, \dots, \hat{a}_n^*] \begin{bmatrix} \Omega_{11} & \dots & \Omega_{1n} \\ \vdots & & \vdots \\ \Omega_{n1} & \dots & \Omega_{nn} \end{bmatrix} \begin{bmatrix} \hat{a}_1 \\ \vdots \\ \hat{a}_n \end{bmatrix} \end{aligned} \quad (4)$$

with Ω an $n \times n$ complex Hermitian matrix, and is coupled to m bosonic quantum fields $\hat{\mathbf{B}}(t) = [\hat{B}_1(t), \dots, \hat{B}_m(t)]^T$ whose algebraic properties are characterised by the commutation relations

$$[\hat{B}_i(t), \hat{B}_j^*(s)] = \min\{s, t\} \delta_{ij} \hat{1},$$

or alternatively by

$$[\hat{b}_i(t), \hat{b}_j^*(s)] = \delta(t - s) \delta_{ij} \hat{1}. \quad (5)$$

where $\hat{\mathbf{b}}(t) = [\hat{b}_1(t), \dots, \hat{b}_m(t)]^T$ is the white noise operator formally defined as $\hat{\mathbf{b}}(t) = d\hat{\mathbf{B}}(t)/dt$.

The coupling between system and field is described by the following set of operators (c_{ij} is a complex number):

$$\hat{\mathbf{L}} = C\hat{\mathbf{a}} = \begin{bmatrix} c_{11} & \dots & c_{1n} \\ \vdots & & \vdots \\ c_{m1} & \dots & c_{mn} \end{bmatrix} \begin{bmatrix} \hat{a}_1 \\ \vdots \\ \hat{a}_n \end{bmatrix}.$$

More precisely, the joint system-field evolution up to time t is given by the unitary operator $\hat{U}(t)$ satisfying the quantum stochastic differential equation [28]

$$d\hat{U}(t) = \left(d\hat{\mathbf{B}}^\dagger(t)\hat{\mathbf{L}} - \hat{\mathbf{L}}^\dagger d\hat{\mathbf{B}}(t) - \frac{1}{2}\hat{\mathbf{a}}^\dagger A \hat{\mathbf{a}} dt \right) \hat{U}(t),$$

where

$$A := -i\Omega - \frac{1}{2}C^\dagger C. \quad (6)$$

This type of system is called “passive”, because the operators do not involve the creation process such as $\hat{a}_i^* \hat{a}_j^*$ in $\hat{H}$ and $\hat{a}_i^*$ in $\hat{\mathbf{L}}$, representing a purely dissipative evolution.

The Heisenberg evolution of the system operators is

$$\hat{\mathbf{a}}(t) = \hat{U}(t)^* \hat{\mathbf{a}} \hat{U}(t),$$

which by differentiation gives the equation

$$d\hat{\mathbf{a}}(t) = A\hat{\mathbf{a}}(t)dt - C^\dagger d\hat{\mathbf{B}}(t). \quad (7)$$

Similarly, the output process

$$\hat{\mathbf{B}}^{\text{out}}(t) = \hat{U}(t)^* \hat{\mathbf{B}}(t) \hat{U}(t)$$

satisfies the differential equation

$$d\hat{\mathbf{B}}^{\text{out}}(t) = C\hat{\mathbf{a}}(t)dt + d\hat{\mathbf{B}}(t). \quad (8)$$

The Laplace transform $\mathcal{L}[\hat{x}](s)$ of $\hat{x}(t)$ is defined as in (1), for $\text{Re}(s) < 0$. As we will be assuming that the system is stable, the initial state of the system is irrelevant in the long time limit, and we can set its mean to zero $\langle \hat{\mathbf{a}}(0) \rangle = 0$. In the Laplace domain the input-output relation is a simple multiplication

$$\mathcal{L}[\hat{\mathbf{b}}^{\text{out}}](s) = \Xi(s)\mathcal{L}[\hat{\mathbf{b}}](s), \quad (9)$$

where $\Xi(s)$ is the transfer function matrix:

$$\Xi(s) := I - C(sI - A)^{-1}C^\dagger. \quad (10)$$

C. System identifiability

Broadly speaking, by system identification we mean the estimation of the parameters Ω and C which completely characterize the linear quantum system described by (7) and (8). This task can be analysed in various scenarios, depending on the experimenter’s ability to prepare the state of the input and the initial state of the system, and the type of measurements used for extracting information about the dynamics. Here we restrict to a scenario which is most suitable for quantum control applications, and is a close extension of the classical set-up. More precisely, we assume that the experimenter can prepare input field in a coherent state whose mean vector has a desired time dependence

$$\langle \hat{\mathbf{b}}(t) \rangle = \beta(t),$$

and can perform standard (e.g. homodyne and heterodyne) measurements on the output, but does not have direct access to the system.

By equation (9), the frequency domain output modes $\hat{\mathbf{b}}^{\text{out}}(i\omega)$ are related to their input correspondents $\hat{\mathbf{b}}(i\omega)$, through the linear transformations $\Xi(i\omega)$. Note that since

$\hat{\mathbf{b}}^{\text{out}}(i\omega)$ must satisfy canonical commutation relations similar to (5), the matrix $\Xi(i\omega)$ must be unitary for all ω , as it can also be verified by direct computation [19]. It is clear that the experimenter can at most determine the transfer function, and this can be done by preparing appropriate inputs (e.g. sinusoids with a certain frequency ω) and observing the outputs. The transfer function matrix $\Xi(s)$ can be determined from the relation between input and output fields

$$\mathcal{L}[\langle \hat{\mathbf{b}}^{\text{out}} \rangle](s) = \Xi(s)\mathcal{L}[\beta](s).$$

More generally, we can consider that the system matrices are not completely unknown but depend on an unknown parameter $\theta \in \Theta$ such that

$$(\Omega, C) = (\Omega(\theta), C(\theta)), \quad (11)$$

and $\Xi(s) = \Xi(s; \theta)$ correspondingly. The task is then to estimate the unknown parameter θ using the input and output relations (see Fig. 1), and we define the identifiability of the system as follows.

Definition 2.1: The system parameter θ is identifiable if $\Xi(s; \theta) = \Xi(s; \theta')$ for all s implies $\theta = \theta'$.

III. IDENTIFIABILITY CONDITIONS

In this section, we provide some basic necessary and sufficient conditions for the passive linear system (7) and (8) to be identifiable, in the sense of Definition 2.1.

A. Observability, controllability and minimality

The concepts of controllability and observability have a straightforward, though arguably non unique, extension to the quantum domain. The system defined by (7) and (8) is controllable if for any times $t_0 < t_1$ and any means $x_0, x_1 \in \mathbb{C}^n$ there exists a coherent input which drives the initial coherent state $|x_0\rangle$ into the final state $|x_1\rangle$ over the time interval $[t_0, t_1]$. This is equivalent to the fact that the *controllability matrix*

$$\mathcal{C} = -[C^\dagger, AC^\dagger, \dots, A^n C^\dagger]$$

has full row rank.

Similarly, the system is observable if for any times $t_0 < t_1$, an unknown initial coherent state of the system can be estimated from the history of (coherent) input and output over the time interval $[t_0, t_1]$. This is equivalent to the fact that the *observability matrix*

$$\mathcal{O} = [C^T, (CA)^T, \dots, CA^n]^T$$

has full row rank. As in the classical case, if the system is not controllable or observable then there exists a lower dimensional system with the same transfer function as the original one. Therefore, we focus on minimal quantum systems. The following lemma shows that in the case of passive quantum linear systems we need to check only one of the controllability and observability conditions to verify that the system is minimal.

Lemma 3.1: For the quantum linear system (7) and (8), the controllability and the observability conditions are equivalent.

Proof: From the result of system theory, $(A, C^\dagger)$ controllability is equivalent to the following condition:

$$yA = \lambda y \Rightarrow yC^\dagger \neq 0. \quad (12)$$

This implies that the following condition holds:

$$zA^\dagger = \mu z \Rightarrow zC^\dagger \neq 0. \quad (13)$$

To prove this, suppose that there exists a vector z satisfying $zA^\dagger = \mu z$ and $zC^\dagger = 0$. This implies that $z\Omega = -i\mu z$ and $zC^\dagger C = 0$, thus we have $zA = z(-i\Omega - C^\dagger C/2) = -\mu z$. But now z is contained in the kernel of $C^\dagger$, this is contradiction to (12). The condition (13) is the iff condition for $(A^\dagger, C^\dagger)$ controllability, thus equivalently (A, C) observability. ■

We here provide an additional result for later use.

Lemma 3.2: The quantum linear system (7) and (8) having the minimality property is stable.

Proof: Because of the minimality, the system satisfies the condition (13); hence $z^\dagger$ is an eigenvector of A and μ^* is the corresponding eigenvalue. Then the relation $zA^\dagger = \mu z$ readily leads to $\text{Re}(\mu) = -\|Cz^\dagger\|/2\|z^\dagger\|$, which is strictly negative due to $zC^\dagger \neq 0$. Therefore A is a Hurwitz matrix. ■

B. The identifiability conditions

As noted above, by appropriately choosing the input signal $\beta(t)$, the observer can effectively identify the transfer function $\Xi(s)$, while other independent parameters in the system matrices are not identifiable. The following theorem gives a precise characterization of systems which are equivalent in the sense that they cannot be distinguished based on the input-output relation.

Theorem 3.1: Let (Ω_1, C_1) and (Ω_2, C_2) be two linear systems as defined in (7) and (8), and assume that both systems are minimal. Then they have the same transfer function if and only if there exists a unitary matrix T such that

$$\Omega_2 = T\Omega_1 T^\dagger, \quad C_2 = C_1 T^\dagger. \quad (14)$$

Proof: It is well known in the system control theory that two minimal systems have equal transfer functions

$$C_1(sI - A_1)^{-1}C_1^\dagger = C_2(sI - A_2)^{-1}C_2^\dagger,$$

(we here omit the trivial constant term I) if and only if there exists an invertible matrix T satisfying

$$A_2 = TA_1 T^{-1}, \quad C_2^\dagger = TC_1^\dagger, \quad C_2 = C_1 T^{-1}. \quad (15)$$

Note that T is not assumed to be unitary. Using the second and third conditions we have $C_1(T^\dagger T) = C_1$, which further gives $[T^\dagger T, C_1^\dagger C_1] = 0$. Also, applying the second and third conditions to the first one, we have $\Omega_2 = T\Omega_1 T^{-1}$. Then, because Ω_i is a Hermitian matrix, $[T^\dagger T, \Omega_1] = 0$ holds. Combining these two results we obtain $[T^\dagger T, A_1] = 0$. Therefore we have

$$C_1 A_1 = C_1 (T^\dagger T) A_1 = C_1 A_1 (T^\dagger T),$$

which means that the observability matrix $\mathcal{O}$ satisfies $\mathcal{O} = \mathcal{O} T^\dagger T$. Because of the assumption $\mathcal{O}$ is of full rank, thus T

is unitary. Therefore the conditions (15) are reduced to (14). ■

For a parametrized model the identifiability condition is given by the following.

Corollary 3.1: Let $(\Omega(\theta), C(\theta))$ be a minimal system with unknown parameter $\theta \in \Theta$. Then θ is identifiable if and only if

$$\Omega(\theta') = T\Omega(\theta)T^\dagger, \quad C(\theta') = C(\theta)T^\dagger$$

implies $\theta = \theta'$ for any unitary matrix T .

The above result can be interpreted as follows. In the classical set-up the matrix T corresponds to the coordinate transformation $x_2 = Tx_1$ where x_i is the variable of the linear system. In our case, the transformation is $\hat{a}' = T\hat{a}$ and the unitarity of T means that the canonical commutation relation (3) is preserved. Note that if the system contained a classical component, T would not necessarily be unitary. Similarly, if the system is not passive, then one needs to consider both $\hat{a}$ and $\hat{a}^*$ as coordinates, and corresponding doubled up transfer matrices [29].

In addition to the above corollary, we give another criterion for testing the identifiability. Note this result does not require the minimality of the system.

Lemma 3.3: The parameter θ is identifiable if and only if

$$C(\theta)\Omega(\theta)^k C(\theta)^\dagger = C(\theta')\Omega(\theta')^k C(\theta')^\dagger, \quad \forall k \quad (16)$$

implies $\theta = \theta'$.

Proof: For simplicity let us denote $C := C(\theta)$, $C' := C(\theta')$ and similarly for Ω and A . By expanding the equation $\Xi(s; \theta) = \Xi(s; \theta')$ with respect to s and comparing their coefficients, we have $CA^k C^\dagger = C'A'^k C'^\dagger$ for all k , and thus

$$C(-i\Omega - \frac{1}{2}C^\dagger C)^k C^\dagger = C'(-i\Omega' - \frac{1}{2}C'^\dagger C')^k C'^\dagger.$$

This k -th order polynomial is constructed by the linear combination of $C[(C^\dagger C)^p \circ \Omega^q]C^\dagger$ with $p+q=k$, where $\circ$ means the symmetrization, e.g., for $k=3$

$$(C^\dagger C)^1 \circ \Omega^2 = (C^\dagger C)\Omega^2 + \Omega(C^\dagger C)\Omega + \Omega^2(C^\dagger C)^2.$$

The relations (16) can be proved by induction with respect to k , noting that for $k=0,1$ we have $CC^\dagger = C'C'^\dagger$ and respectively $C\Omega C^\dagger = C'\Omega' C'^\dagger$, and the k step can be obtained from the expansion of $CA^k C^\dagger = C'A'^k C'^\dagger$, by using all the previous steps. ■

C. Examples

We will apply now the identifiable conditions to some quantum linear networks. For simplicity, we will assume that the coupling matrix C is known.

Example 3.1: Consider a chain with three nodes, as depicted in Fig. 2 (a). The system couples with a single input field (wavy lines) through the first node, such that $\hat{L} = \sqrt{2\kappa}\hat{a}_1$ and the coupling matrix is

$$C = [\sqrt{2\kappa}, 0, 0]. \quad (17)$$

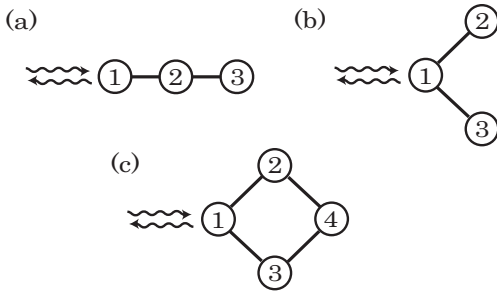


Fig. 2. Examples of quantum linear networks; (a) chain, (b) tree, and (c) ring. In each case, only the first node is coupled to the fields (wavy lines). The straight lines represent interactions between nodes.

The system Hamiltonian has two terms (straight lines) describing the interaction between neighboring nodes, and is given by

$$\hat{H} = \theta_1(\hat{a}_1^* \hat{a}_2 + \hat{a}_1 \hat{a}_2^*) + \theta_2(\hat{a}_2^* \hat{a}_3 + \hat{a}_2 \hat{a}_3^*),$$

hence

$$\Omega(\theta) = \begin{bmatrix} 0 & \theta_1 & 0 \\ \theta_1 & 0 & \theta_2 \\ 0 & \theta_2 & 0 \end{bmatrix}, \quad \theta = (\theta_1, \theta_2),$$

where θ_1 and θ_2 are unknown coupling constants which need to be estimated.

To test the identifiability we apply Lemma 3.3 and compute

$$\begin{aligned} C\Omega(\theta)C^\dagger &= 0, & C\Omega(\theta)^2C^\dagger &= 2\kappa\theta_1^2, \\ C\Omega(\theta)^3C^\dagger &= 0, & C\Omega(\theta)^4C^\dagger &= 2\kappa\theta_1^2(\theta_1^2 + \theta_2^2). \end{aligned}$$

Therefore $C\Omega(\theta)^2C^\dagger = C\Omega(\theta')^2C^\dagger$ implies $\theta_1^2 = \theta_1'^2$, and $C\Omega(\theta)^4C^\dagger = C\Omega(\theta')^4C^\dagger$ implies $\theta_1^2(\theta_1^2 + \theta_2^2) = \theta_1'^2(\theta_1'^2 + \theta_2'^2)$. The two conditions together give $\theta_2^2 = \theta_2'^2$, if $\theta_1 \neq 0$. One can verify that no additional relations arise from $C\Omega(\theta)^kC^\dagger = C\Omega(\theta')^kC^\dagger$ with $k > 4$, and therefore the parameters θ_1, θ_2 are identifiable up to a sign.

For this system, we immediately see that the controllability condition (thus the observability condition as well) is satisfied. Thus we can apply Corollary 3.1 and find that the unitary matrices $T_1 = \text{Diag}(1, -1, 1)$, $T_2 = \text{Diag}(1, 1, -1)$, and $T_3 = \text{Diag}(1, -1, -1)$ satisfy $CT^\dagger = C$ and transform the system with parameter $\theta = (\theta_1, \theta_2)$ into that with the system with parameter $(-\theta_1, -\theta_2)$, $(-\theta_1, \theta_2)$ and $(\theta_1, -\theta_2)$, respectively. This gives an alternative proof of the fact that the equivalence class consists of the parameters $\{(\pm\theta_1, \pm\theta_2)\}$.

A third route is to look directly at the transfer function given by

$$\Xi(s) = \frac{s^3 - \kappa s^2 + (\theta_1^2 + \theta_2^2)s - \kappa\theta_2^2}{s^3 + \kappa s^2 + (\theta_1^2 + \theta_2^2)s + \kappa\theta_2^2},$$

and note that the poles give us enough information to determine both θ_1^2 and θ_2^2 . Note when $\theta_1 = 0$ (i.e., there is no connection between nodes 1 and 2), $\Xi(s) = (s - \kappa)/(s + \kappa)$, hence clearly θ_2 cannot be estimated.

Example 3.2: The second example is a simple tree shown in Fig. 2 (b). Node 1 is coupled to the input field and is connected to both nodes 2 and 3, thus the system Hamiltonian is of the form

$$\hat{H} = \Delta \hat{a}_2^* \hat{a}_2 + \theta_1(\hat{a}_1^* \hat{a}_2 + \hat{a}_1 \hat{a}_2^*) + \theta_2(\hat{a}_1^* \hat{a}_3 + \hat{a}_1 \hat{a}_3^*),$$

hence we have

$$\Omega(\theta) = \begin{bmatrix} 0 & \theta_1 & \theta_2 \\ \theta_1 & \Delta & 0 \\ \theta_2 & 0 & 0 \end{bmatrix}. \quad (18)$$

The C matrix is the same as in (17).

The additional Hamiltonian $\Delta \hat{a}_2^* \hat{a}_2$ is necessary for the parameters θ_1 and θ_2 to be identifiable, due to the following reason. If $\Delta = 0$, we obtain $C\Omega(\theta)^kC^\dagger = (\theta_1^2 + \theta_2^2)^{2k}$ when k is an even number while it takes 0 otherwise. Therefore, we can identify $\theta_1^2 + \theta_2^2$ but not the individual components. This is due to the fact that when $\Delta = 0$ we cannot distinguish the nodes 2 and 3. To break this symmetry we introduce the term $\Delta \hat{a}_2^* \hat{a}_2$ and we get

$$\begin{aligned} C\Omega C^\dagger &= 0, & C\Omega^2 C^\dagger &= \theta_1^2 + \theta_2^2 \\ C\Omega^3 C^\dagger &= \Delta\theta_1^2, & C\Omega^4 C^\dagger &= (\theta_1^2 + \theta_2^2)^2 + \theta_1^2\Delta^2. \end{aligned}$$

This implies that all parameters are identifiable up to the signs of θ_1 and θ_2 .

Example 3.3: The last example is a ring-type network shown in Fig. 2 (c), where only the first node is accessible like the previous two cases. For this system the Hamiltonian is given by

$$\begin{aligned} \hat{H} &= \theta_1(\hat{a}_1^* \hat{a}_2 + \hat{a}_1 \hat{a}_2^*) + \theta_2(\hat{a}_1^* \hat{a}_3 + \hat{a}_1 \hat{a}_3^*) \\ &\quad + \theta_3(\hat{a}_2^* \hat{a}_4 + \hat{a}_2 \hat{a}_4^*) + \theta_4(\hat{a}_3^* \hat{a}_4 + \hat{a}_3 \hat{a}_4^*), \end{aligned}$$

thus we have

$$\Omega(\theta) = \begin{bmatrix} 0 & \theta_1 & \theta_2 & 0 \\ \theta_1 & 0 & 0 & \theta_3 \\ \theta_2 & 0 & 0 & \theta_4 \\ 0 & \theta_3 & \theta_4 & 0 \end{bmatrix}, \quad (19)$$

while the C matrix is given by $C = [\sqrt{2\kappa}, 0, 0, 0]$.

Let us first check the minimality. A direct computation shows that the observability matrix $\mathcal{O}$ satisfies $\det(\mathcal{O}) = 4\kappa^2(\theta_1\theta_3 + \theta_2\theta_4)^2(\theta_2\theta_3 - \theta_1\theta_4)$. Hence, if the parameters satisfy $\det(\mathcal{O}) \neq 0$, the system is minimal. Now consider two set of parameters θ and θ' related through a certain 2×2 unitary matrix U as follows

$$U \begin{bmatrix} \theta_1 \\ \theta_2 \end{bmatrix} = \begin{bmatrix} \theta'_1 \\ \theta'_2 \end{bmatrix}, \quad U \begin{bmatrix} \theta_3 \\ \theta_4 \end{bmatrix} = \begin{bmatrix} \theta'_3 \\ \theta'_4 \end{bmatrix}. \quad (20)$$

Then, by the unitary matrix $T = \text{Diag}\{1, U, 1\}$ satisfies $C = CT$ and

$$T\Omega(\theta)T^\dagger = \begin{bmatrix} 0 & \theta_{12}^T U^T & 0 \\ U\theta_{12} & O & U\theta_{34} \\ 0 & \theta_{34}^T U^T & 0 \end{bmatrix} = \Omega(\theta').$$

Hence, from Theorem 3.1, the system with the parameter θ has the same transfer function as that of the system with θ' defined by (20). Thus, this system is not (completely) identifiable.

IV. IDENTIFICATION OF THE SYSTEM MATRICES

Let us consider the situation where the transfer function $\Xi(s)$ has actually been constructed from the input-output data. In the SISO (single input - single output) case, this will be a rational function of the form

$$\Xi(s) = 1 + \frac{c_{n-1}s^{n-1} + \dots + c_0}{s^n + a_{n-1}s^{n-1} + \dots + a_0},$$

which is completely determined by the coefficients c_i, a_j . As it is well known in systems theory, the coefficient matrices

$$A_0 = \begin{bmatrix} 0 & 1 & & 0 \\ & \ddots & \ddots & \\ 0 & & 0 & 1 \\ -a_0 & -a_1 & & -a_{n-1} \end{bmatrix}, \quad B_0 = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ 1 \end{bmatrix},$$

$$C_0 = [c_0, \dots, c_{n-1}] \quad (21)$$

give a realization of $\Xi(s)$, i.e., $\Xi(s) = 1 + C_0(sI - A_0)^{-1}B_0$, and any other set of coefficient matrices having the same transfer function can be generated via the following similarity transformation:

$$A = TA_0T^{-1}, \quad B = TB_0, \quad C = C_0T^{-1}. \quad (22)$$

However, the matrices (21) do not satisfy the constraints imposed on passive linear quantum systems. This means that, for general T , the transformation (22) does not yield the set of coefficient matrices of quantum systems; e.g., the relation $B = -C^\dagger$ does not hold. Clearly, in this case, the system matrices (Ω, C) cannot be reconstructed. This issue is serious, because from the physics viewpoint we are often interested in those system matrices rather than the transfer function. Therefore, we need to find a specific T so that the coefficient matrices (22) satisfy the constraints and that the system matrices can be reconstructed. In this section, we provide a concrete procedure to achieve this goal.

A. Reconstruction of system matrices

Let (A_0, B_0, C_0) be constructed from the transfer function of the quantum system (7) and (8) (note that now it is not limited to SISO). Then, for a certain matrix T , the matrices (22) satisfy the constraints (6), which immediately yields $A + A^\dagger + C^\dagger C = 0$, and $B = -C^\dagger$. These conditions are written in terms of (A_0, B_0, C_0) as

$$(T^\dagger T)A_0 + A_0^\dagger(T^\dagger T) + C_0^\dagger C_0 = 0 \quad (23)$$

and $(T^\dagger T)B_0 = -C_0^\dagger$. Now the system is assumed to be minimal, thus A_0 is Hurwitz from Lemma 3.2. This means that the Lyapunov equation (23) has a unique solution $T^\dagger T > 0$. Accordingly, we have the diagonalization $T^\dagger T = U_0 \Lambda U_0^\dagger$, where $\Lambda > 0$ is a diagonal matrix composed of eigenvalues of $T^\dagger T$ and U_0 the corresponding unitary matrix. Then, T is fully characterized by an arbitrary unitary matrix U as

$$T = U\sqrt{\Lambda}U_0^\dagger, \quad (24)$$

where $\sqrt{\Lambda}$ is a positive diagonal matrix satisfying $(\sqrt{\Lambda})^2 = \Lambda$. This is the similarity transformation generating the equivalence class of quantum systems. In general, (24) is not unitary, because (A_0, B_0, C_0) are not necessarily the coefficient

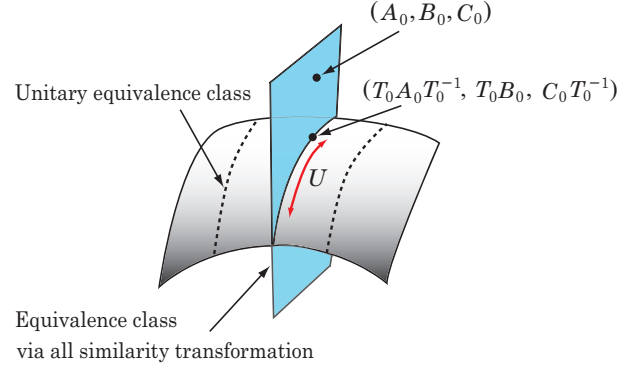


Fig. 3. Unitary equivalence class of system's coefficient matrices, which is generated from (A_0, B_0, C_0) . We denote $T_0 = \sqrt{\Lambda}U_0^\dagger$.

matrices of a quantum system. Also note that in a practical situation we need to check if (24) satisfies the other condition $(T^\dagger T)B_0 = -C_0^\dagger$.

Now we can reconstruct the system matrices. Again it follows from (6) that $TA_0T^{-1} = -i\Omega - (C_0T^{-1})^\dagger(C_0T^{-1})$. Using (24), then we can represent Ω as follows:

$$\begin{aligned} \Omega &= U\Omega_0U^\dagger, \\ \Omega_0 &= \frac{i}{2} \left[\sqrt{\Lambda}U_0^\dagger A_0 U_0 \sqrt{\Lambda^{-1}} - \sqrt{\Lambda^{-1}}U_0^\dagger A_0^\dagger U_0 \sqrt{\Lambda} \right]. \end{aligned} \quad (25)$$

Similarly, from $C = C_0T^{-1}$ we have

$$C = (C_0U_0\sqrt{\Lambda^{-1}})U^\dagger. \quad (26)$$

These are the equivalence class of system matrices constructed from (A_0, B_0, C_0) , which are directly obtained from the transfer function, e.g. via (21) in a SISO case. Note again that (25), (26) are the specific representations of (14) in Theorem 3.1; see Fig. 3.

B. Example

Let us consider a two dimensional SISO system with only single node accessible and assume that the following transfer function has been experimentally obtained:

$$\Xi(s) = 1 + \frac{c_1 s}{s^2 + a_1 s + a_0},$$

where $a_0, a_1 > 0$ and c_1 are real numbers. (As we will explain later, $c_1 = -2a_1$ is satisfied.) For this transfer function we take the typical realization (21); i.e.,

$$A_0 = \begin{bmatrix} 0 & 1 \\ -a_0 & -a_1 \end{bmatrix}, \quad B_0 = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad C_0 = [0, c_1].$$

Note that $B_0 = -C_0^\dagger$ does not hold in general. With this choice, the Lyapunov equation (23) has the following unique solution:

$$T^\dagger T = \frac{c_1^2}{2a_1} \begin{bmatrix} a_0 & 0 \\ 0 & 1 \end{bmatrix},$$

which is equal to Λ , and now $U_0 = I$. Thus, the equivalence class of the system matrices are given by (25) and (26) with

$$\Omega_0 = \begin{bmatrix} 0 & i\sqrt{a_0} \\ -i\sqrt{a_0} & 0 \end{bmatrix}, \quad C_0U_0\sqrt{\Lambda^{-1}} = [0, -\sqrt{2a_1}].$$

This means that the system is a two-node chain with internal coupling strength $\sqrt{a_0}$ and it couples to the outer field for measurement with strength $\sqrt{2a_1}$. In particular, when choosing $U = [0, -1; i, 0]$, we have

$$\Omega = \begin{bmatrix} 0 & \sqrt{a_0} \\ \sqrt{a_0} & 0 \end{bmatrix}, \quad C = [\sqrt{2a_1}, 0],$$

which have exactly the same forms as those in Example 3.1 with specifically $\theta_2 = 0$ taken. Note that the condition $(T^\dagger T)B_0 = -C_0^\dagger$ yields $c_1 = -2a_1$; indeed this relation is satisfied for the two-node chain network, as easily seen by again setting $\theta_2 = 0$ in Example 3.1.

C. Direct reconstruction of system matrices from the transfer function

In Section IV-A we have shown that the system matrices can be reconstructed through typical realization methods employed in classical system theory. We here present another procedure that directly reconstructs the equivalent class of system matrices, using the specific constraints on the quantum systems.

We begin with the simple SISO model where the coupling matrix is of the form $C = (\sqrt{\theta}, 0, \dots, 0)$ with $\theta > 0$ is an unknown parameter; that is, we assume that only a single node is accessible, as in the previous examples. However, we do not assume a specific structure on Ω and write it as

$$\Omega = \begin{bmatrix} \Omega_{11} & E \\ E^\dagger & \tilde{\Omega} \end{bmatrix}, \quad (27)$$

where $\tilde{\Omega}$ is a Hermitian matrix with dimension $n-1$. In this case, the transfer function (10) is given by

$$\Xi(s) = 1 - \theta \left(s + i\Omega_{11} + \frac{\theta}{2} + E(s + i\tilde{\Omega})^{-1}E^\dagger \right)^{-1}.$$

Note again that we are assuming that $\Xi(s)$ is identifiable; that is, $\Xi(s)$ is a known complex rational function. The parameters are then reconstructed as follows.

First, through a straightforward calculation we have

$$s(1 - \Xi(s)) = \frac{\theta}{1 + i\Omega_{11}/s + 1/2s + E(s^2 + is\tilde{\Omega})^{-1}E^\dagger},$$

which thus leads to

$$\theta = \lim_{|s| \rightarrow \infty} s(1 - \Xi(s)).$$

Next, with the use of the knowledge about θ obtained above, we can identify Ω_{11} using the following equation:

$$\Omega_{11} = \lim_{|s| \rightarrow \infty} \left[\frac{i\theta(\Xi(s) + 1)}{2(\Xi(s) - 1)} + is \right].$$

Now, θ and Ω_{11} have been obtained in addition to $\Xi(s)$. This means that the function $\tilde{\Xi}(s) := E(sI + i\tilde{\Omega})^{-1}E^\dagger$ is known. We diagonalize $\tilde{\Omega}$ as $\tilde{\Omega} = V\tilde{\Lambda}V^\dagger$ with $\tilde{\Lambda} = \text{Diag}\{\tilde{\lambda}_1, \dots, \tilde{\lambda}_{n-1}\}$. Then, $\tilde{\Xi}(s) = EV(sI - \tilde{\Lambda})^{-1}(EV)^\dagger$ is of the form

$$\tilde{\Xi}(s) = \sum_{i=1}^{n-1} \frac{|E'_i|^2}{s + i\tilde{\lambda}_i},$$

where E'_i is the i -th element of EV . This implies that $\tilde{\lambda}_i$ can be detected by examining the function $\tilde{\Xi}(i\omega)$; that is, $-i\tilde{\lambda}_i$ is the value on the imaginary axis such that $\tilde{\Xi}(i\omega)$ diverges. Then, (assuming that Ω has non-degenerate spectrum) we can further determine $|E'_i|^2$ from

$$|E'_i|^2 = (s + i\tilde{\lambda}_i)\Xi(s)|_{s=-i\tilde{\lambda}_i}.$$

Lastly, let us express E'_i as $E'_i = e^{i\phi_i}|E'_i|$ with real phases ϕ_i and define $\Phi = \text{Diag}\{\phi_1, \dots, \phi_{n-1}\}$. Then, (27) can be written

$$\Omega = \begin{bmatrix} 1 & 0 \\ 0 & Ve^{-i\Phi} \end{bmatrix} \begin{bmatrix} \Omega_{11} & |E'| \\ |E'|^\top & \tilde{\Lambda} \end{bmatrix} \begin{bmatrix} 1 & 0 \\ 0 & e^{i\Phi}V^\dagger \end{bmatrix},$$

where $|E'| = [|E'_1|, \dots, |E'_{n-1}|]$. As shown above, the middle matrix can be completely identified from the transfer function $\Xi(s)$. Therefore, all the eigenvalues of Ω can now be determined. Let us now summarize the result.

Theorem 4.1: The equivalence class of systems having a given transfer function $\Xi(s)$ is completely parametrised by the set of parameters $(\theta, \Omega_{11}, |E'_i|, \tilde{\lambda}_i) \in \mathbb{R}^{2n}$, which are directly computed from $\Xi(s)$ using the above procedure. In particular, the system parameter θ and the eigenvalues of Ω can be identified.

To describe the general case, we assume that the $m \times n$ matrix C is of rank m ; roughly speaking, this means that all the injected input fields couple with the system. Furthermore, we assume $m \leq n$; in this case, without loss of generality, C can be expressed as

$$C = (\tilde{C}, 0),$$

with $\tilde{C}$ a $m \times m$ full rank complex matrix. Correspondingly, we represent Ω as in the same form (27), in which case Ω_{11} is a $m \times m$ Hermitian matrix. Then, as in the previous case we have

$$\tilde{C}\tilde{C}^\dagger = \lim_{|s| \rightarrow \infty} s(1 - \Xi(s)).$$

This means that $\tilde{C}$ can be represented in terms of a known strictly positive matrix $\tilde{C}_0$ and an arbitrary unitary matrix $\tilde{U}$ as $\tilde{C} = \tilde{C}_0\tilde{U}$. Moreover,

$$\tilde{U}\Omega_{11}\tilde{U}^\dagger = \lim_{|s| \rightarrow \infty} \left[-i\tilde{C}_0^\dagger(I - \Xi(s))^{-1}\tilde{C}_0 + isI \right] + \frac{i}{2}\tilde{C}_0^\dagger\tilde{C}_0,$$

which means that Ω_{11} can be determined up to the unitary rotation by $\tilde{U}$. Now, we are given

$$\tilde{\Xi}(s) = \tilde{U}E(sI + i\tilde{\Omega})^{-1}(\tilde{U}E)^\dagger,$$

which means that, from the same procedure as in the simple case, we can determine the eigenvalues of $\tilde{\Omega}$ and $E_iE_j^*$ from $\tilde{\Xi}(s)$. Then, consequently, the eigenvalues of Ω can be constructed.

V. NETWORK IDENTIFICATION; THE INFECTION CONDITION

In this section we treat a special class of models, which are identifiable thanks to the special structure of the Hamiltonian. This class was shown to be identifiable in different contexts in [12], [14].

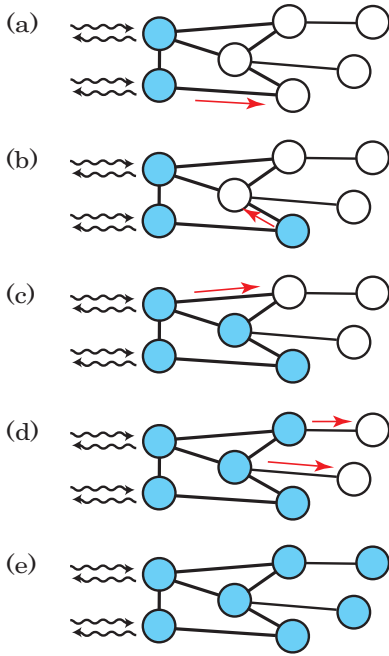


Fig. 4. Infection property. The colored node indicates that it is infected, and the arrow indicates that the infection occurs along that edge. Through the steps from (a) to (e), the network becomes infected.

Let $\mathcal{V}$ be the set of vertices representing the modes of our continuous variables system. The interactions between the different modes are modeled by the set of edges $\mathcal{E}$ over $\mathcal{V}$:

$$\mathcal{E} \subset \mathcal{V} \times \mathcal{V},$$

so that two modes i and j interact if they are connected by an edge. More precisely, we assume that the matrix Ω describing the system Hamiltonian is of the form

$$\Omega(\theta) = \sum_{(i,j) \in \mathcal{E}} \omega_{i,j} (e_i e_j^T + e_j e_i^T), \quad (28)$$

where $\omega_{i,j}$ are unknown *real* coefficients which make up the parameter θ and $e_i = [0, \dots, 1, \dots, 0]^T$ is the basis vector having zeros except the i th element. We further assume that the coupling between the system and the field is known and specified by the matrix C whose support is spanned by a set of basis vectors $\{e_i : i \in \mathcal{I}\}$ for some set of vertices $\mathcal{I}$, the restriction of $C^\dagger C$ to this subspace being strictly positive.

The crucial property we will require of $\mathcal{I}$ is that it is *infecting* for the graph $(\mathcal{V}, \mathcal{E})$, which can be defined sequentially by the following conditions (see Fig. 4):

- (i) At the beginning the vertices in $\mathcal{I}$ are infected;
- (ii) If an infected vertex has only one non-infected neighbour, the neighbour gets infected;
- (iii) After some interactions all nodes end up infected.

Roughly speaking, this infection property means that the network is similar to a “chain”, where the neighboring nodes are coupled to each other. Such a chain structure often appears in practical situations, and as shown in [30], it can be fully controlled by only accessing to its local subsystem. Also it is notable that in general a chain structure

realizes fast spread of quantum information [31] and is thus suitable for e.g. distributing quantum entanglement. The result we present here is that such a useful network is always identifiable under a mild condition.

Theorem 5.1: Let $\Omega(\theta)$ be given by Eq. (28), and assume that the support of C is spanned by $\{e_i : i \in \mathcal{I}\}$ with $(\mathcal{I}, \mathcal{V}, \mathcal{E})$ having the infecting property. Then, if the system is minimal, $\Omega(\theta)$ is identifiable.

Proof: Recall that by Theorem 3.1 two parameters are in the same equivalence class if and only if there exists an $n \times n$ unitary matrix U such that

$$\Omega(\theta_2) = U \Omega(\theta_1) U^\dagger, \quad (29)$$

and

$$C = CU. \quad (30)$$

The latter condition implies $[U, C^\dagger C] = 0$ and in particular U commutes with projection P onto the support of $C^\dagger C$ so that

$$U = \begin{pmatrix} I & 0 \\ 0 & V \end{pmatrix} \quad (31)$$

with V unitary on the orthogonal complement of the support of C . Let us write the Hamiltonian in the block form according to the partition $\mathcal{J} = \mathcal{I} \cup \mathcal{I}^c$:

$$\Omega(\theta) = \begin{pmatrix} \Omega_{11}(\theta) & \Omega_{12}(\theta) \\ \Omega_{21}(\theta) & \Omega_{22}(\theta) \end{pmatrix}.$$

Then Eq. (29) implies that

$$\Omega_{11}(\theta_2) = \Omega_{11}(\theta_1), \quad (32)$$

$$\Omega_{12}(\theta_2) = \Omega_{12}(\theta_1) V^\dagger, \quad (33)$$

$$\Omega_{22}(\theta_2) = V \Omega_{22}(\theta_1) V^\dagger. \quad (34)$$

The identity (32) means that

$$\omega_{i,j}(\theta_1) = \omega_{i,j}(\theta_2), \quad i, j \in \mathcal{I}. \quad (35)$$

Furthermore, since $\mathcal{I}$ is infecting, there exists at least one vertex $i_0 \in \mathcal{I}$ which is connected to exactly one vertex $j_0 \in \mathcal{I}^c$, so that $\Omega_{12}(\theta)$ can be written as

$$\begin{aligned} \Omega_{12}(\theta) &= \omega_{i_0, j_0} e_{i_0} e_{j_0}^T + \omega_{i_0, j_0} e_{i_0} e_{j_0}^T \\ &+ \sum_{i \in \mathcal{I}, i \neq i_0} \sum_{j \in \mathcal{I}^c} \omega_{i,j}(\theta) (e_i e_j^T + e_j e_i^T). \end{aligned}$$

Eq. (33) then implies

$$\omega_{i_0, j_0}(\theta_1) V e_{j_0} = \omega_{i_0, j_0}(\theta_2) e_{j_0},$$

which means that e_{j_0} is an eigenvector of V and $\omega_{i_0, j_0}(\theta_2) = \exp(i\phi_0) \omega_{i_0, j_0}(\theta_1)$ for some phase ϕ_0 . But since the coefficients of $\Omega(\theta)$ are assumed to be real, this implies that

$$\omega_{i_0, j_0}(\theta_1) = \omega_{i_0, j_0}(\theta_2), \quad i \in \mathcal{I}. \quad (36)$$

Additionally, since $V e_{j_0} = e_{j_0}$, a decomposition of the form (31) holds with the identity block supported by the index set $\mathcal{I}' = \mathcal{I} \cup \{j_0\}$.

The same argument can now be repeated for the set $\mathcal{I}'$, and by using the infecting property, all vertices will be eventually included in the growing set of indices, so that at the end we

have $\Omega(\theta_1) = \Omega(\theta_2)$. Consequently, from Corollary 3.1, the system is identifiable. ■

From this result, we now readily see that the chain system studied in Example 3.1 in Section III C is identifiable, since clearly this system is infecting. On the other hand, the tree and the ring structural systems examined in the same section are not infecting, hence Theorem 5.1 states nothing about the identifiability of these systems; in fact, as shown there, the tree system is identifiable, while the ring one is not.

VI. CONCLUSION AND FUTURE WORKS

In Theorem 3.1 we have shown that minimal passive linear systems with the same transfer function are related by unitary transformations. This is different from classical systems where the equivalence class is given by similarity transformations, the reason for that being the more rigid structure of the system equations (7) and (8) in the case of passive quantum systems. The characterisation of the equivalence class for general “active” linear systems remains an open problem.

Another important issue which was addressed only briefly here is how to actually estimate the system parameters. More precisely, what kind of input state should be chosen and what measurement should be performed on the output. The performance of such a design of experiment can be measured by using statistical tools such as Fisher information and asymptotic normality [16].

Finally, the system identification problem can be considered in a different setting, where the input fields are stationary (quantum noise) but have a non-trivial covariance matrix (squeezing). In this case the characterisation of the equivalence classes boils down to finding the systems with the same power spectral density, a problem which is well understood in the classical setting [25] but not yet addressed in the quantum domain.

Some of these questions will be addressed in the future work [32].

REFERENCES

- [1] J. P. Dowling and G. J. Milburn, Quantum technology: the second quantum revolution, *Phil. Trans. R. Soc. Lond. A* 361, 1655–1674, 2003.
- [2] M. Nielsen and I. Chuang, *Quantum Computation and Quantum Information*, Cambridge University Press, 2000.
- [3] V. P. Belavkin, Measurement, filtering and control in quantum open dynamical systems, *Rep. on Math. Phys.* 43, 405–425, 1999.
- [4] H. Mabuchi and N. Khaneja, Principles and applications of control in quantum systems, *Int. J. Robust Nonlinear Control* 15, 647–667, 2005.
- [5] L. Bouten, R. van Handel, and M. James, An introduction to quantum filtering, *SIAM J. Control Optim.* 46, 2199–2241, 2007.
- [6] L. Ljung, *System Identification: Theory for the User*, Prentice Hall, 1987.
- [7] H. Mabuchi, Dynamical identification of open quantum systems, *Quantum Semiclass. Opt.* 8, 1103, 1996.
- [8] J. Gambetta and H. M. Wiseman, State and dynamical parameter estimation for open quantum systems, *Phys. Rev. A* 64, 042105, 2001.
- [9] J. K. Stockton, J. M. Geremia, A. C. Doherty, and H. Mabuchi, Robust quantum parameter estimation: Coherent magnetometry with feedback, *Phys. Rev. A* 69, 032109, 2004.
- [10] B. A. Chase and J. M. Geremia, Single-shot parameter estimation via continuous quantum measurement, *Phys. Rev. A* 79, 022314, 2009.
- [11] D. Burgarth, K. Maruyama, and F. Nori, Coupling strength estimation for spin chains despite restricted access, *Phys. Rev. A* 79, 020305, 2009.
- [12] D. Burgarth and K. Maruyama, Indirect Hamiltonian identification through a small gateway, *New J. Phys.* 11, 103019, 2009.
- [13] S. G. Schirmer and D. K. L. Oi, Quantum system identification by Bayesian analysis: Beyond Hamiltonian tomography, *Laser Physics* 20, 1203–1209 (2010).
- [14] D. Burgarth, K. Maruyama, and F. Nori, Indirect quantum tomography of quadratic Hamiltonians, *New J. Phys.* 13, 013019, 2011.
- [15] M. Guta, Fisher information and asymptotic normality in system identification for quantum Markov chains, *Phys. Rev. A* 83, 062324, 2011.
- [16] C. Catana, M. van Horssen, and M. Guta, Asymptotic inference in system identification for the atom maser, *Phil. Trans. R. Soc. A* 370, 5308–5323 (2012).
- [17] D. D’Alessandro, Controllability, observability, and parameter identification of two coupled spin 1’s, *IEEE Trans. Automat. Contr.* 50-7, 1054–1058, 2005.
- [18] D. Burgarth and K. Yuasa, Quantum system identification, *Phys. Rev. Lett.* 108, 080502, 2012.
- [19] J. Gough, R. Gohm, and M. Yanagisawa, Linear quantum feedback networks, *Phys. Rev. A* 78, 062104, 2008.
- [20] M. R. James, H. I. Nurdin, and I. R. Petersen, H^∞ control of linear quantum stochastic systems, *IEEE Trans. Automat. Contr.* 53-8, 1787–1803, 2008.
- [21] H. I. Nurdin, On synthesis of linear quantum stochastic systems by pure cascading, *IEEE Trans. Automat. Contr.* 55-10, 2439–2444, 2010.
- [22] I. R. Petersen, Cascade cavity realization for a class of complex transfer functions arising in coherent quantum feedback control, *Automatica* 47, 1757–1763, 2011.
- [23] N. Yamamoto, Pure Gaussian state generation via dissipation: A quantum stochastic differential equation approach, *Phil. Trans. Roy. Soc. A* 370, 5324, 2012.
- [24] H. M. Wiseman and G. J. Milburn, *Quantum Measurement and Control*, Cambridge Univ. Press, 2009.
- [25] B. D. O. Anderson, The inverse problem of stationary covariance generation, *J. Stat. Phys.* 1-1, 133–147, 1969.
- [26] K. Glover and J. C. Willems, Parametrizations of linear dynamical systems: Canonical forms and identifiability, *IEEE Trans. Automat. Contr.* 19-6, 640–646, 1974.
- [27] M. S. Grewal and K. Glover, Identifiability of linear and nonlinear dynamical systems, *IEEE Trans. Automat. Contr.* 21-6, 833–837, 1976.
- [28] K. R. Parthasarathy, *An introduction to quantum stochastic calculus*, Monographs in Mathematics, 85, Birkhauser Verlag, Basel, 1992.
- [29] J. E. Gough, M. R. James, and H. I. Nurdin, Squeezing components in linear quantum feedback networks, *Phys. Rev. A* 81, 023804 (2010).
- [30] D. Burgarth, S. Bose, C. Bruder, and V. Giovannetti, Local controllability of quantum networks, *Phys. Rev. A* 79, 060305, 2009.
- [31] M. Murphy, S. Montangero, V. Giovannetti, and T. Calarco, Communication at the quantum speed limit along a spin chain, *Phys. Rev. A* 82, 022318 (2010).
- [32] M. Guta and N. Yamamoto, in preparation.